



GENERAL DESCRIPTION

The non self-supporting Polyester-Cardboard Agropur sandwich panels consist of a sheet of bitumen-impregnated felt-cardboard installed on the hidden face referred to as the outer face, and a sheet of polyester on the visible face referred to as the inner face, with a core of polyurethane foam that provides great thermal insulation.

They are designed for false ceilings and linings in farms, industrial buildings and premises where aggressive conditions make their installation necessary.

The recommended maximum length for this product is 8.000 mm, with a useful width of 1.010 mm. For other measurements, please check with the commercial agent.

PRODUCT CERTIFICATIONS

Certificate of conformity.

BENEFITS

As it is a very lightweight prefabricated panel, we would highlight the ease and speed of assembly, homogeneity and quality of the finishes inherent to a product with a continuous manufacturing process.

REACTION TO FIRE


F classification, pursuant to standard UNE-EN 13501-1:2007 +A1:2010.CFC-free.

PRODUCT CHARACTERISTICS


Maximum spans recommended.

THICKNESS (mm)	WEIGHT (kg/m ²)	THERMAL TRANSMITTANCE U (W/m ² K)	
		U with JOINT FACTOR	U without JOINT FACTOR
30	2,50	0,74	0,68
40	2,90	0,57	0,52
50	3,30	0,46	0,42
60	3,70	0,39	0,35


PANEL SECTION

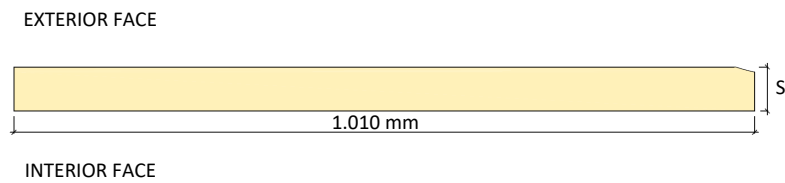

3D COMPOSITION

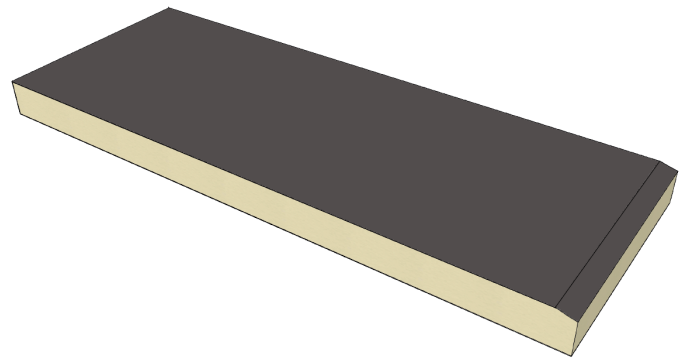

PANEL JOINT

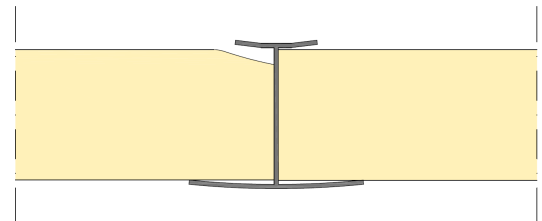

"H" JOINT PROFILE

