

### GENERAL DESCRIPTION

PROFILE METCOPPO consist of a profiled steel sheeting with the following characteristics and types of finish:

Pre-lacquered S250GD + Z100/AZ70

These profiles are designed to enclose sloping roofs with a minimum slope of 10%.

### PRODUCTION SPECIFICATIONS

Useful width	1.000 mm.
Minimal length	1.050 mm.
Maximum length	12.250 mm.
Thickness (mm.)	0,50
Colour position	A in Roof


### PRODUCT CERTIFICATIONS

Certificate of conformity	Data sheet
Type of steel	EN 10346
Organic coatings	EN 10169
Dimensional tolerances	EN 10143

### BENEFITS


Metecno España S.A.U. produces, in addition to insulating sheet metal, a wide range of corrugated sheets with no insulation for the execution of refurbishment works, flat roofs, simple roofs and other various construction-related applications.

### PROFILE SECTION. ROOF POSITION

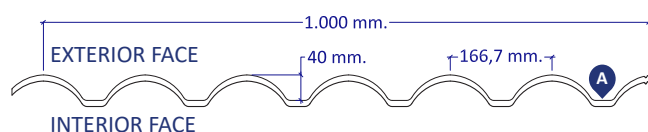

### PROFILE JOINT

Visible fixing

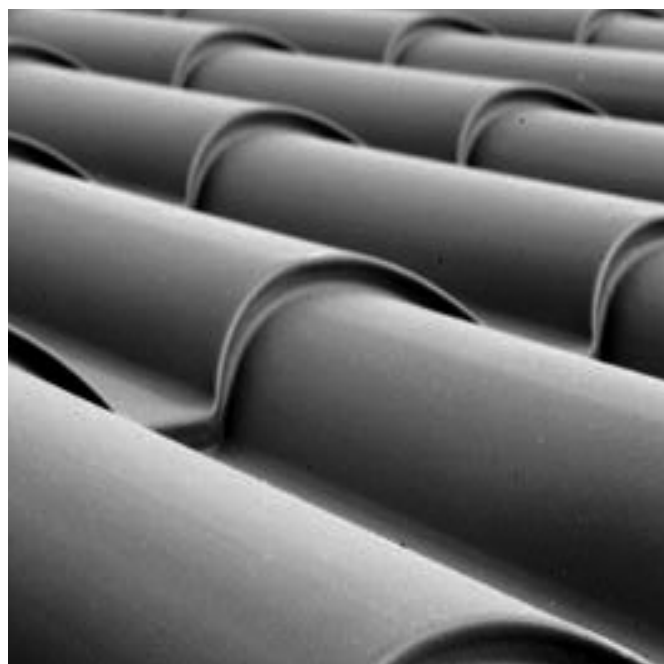

### RECOMMENDED MAXIMUM LOADS DEPENDING ON THE DISTANCE BETWEEN SUPPORTS.


Uniformly distributed maximum load  $p$  (daN / m<sup>2</sup>) for a deflection value  $f \leq l / 200$ .

STEEL THICKNESS (mm)	WEIGHT (kg/m <sup>2</sup> )	OVERLOAD P (daN/m <sup>2</sup> )	ALLOWABLE SPANS L (m)						
			80	100	130	150	180	200	250
0,5	4,79	3 SPANS	756	325	210	146	108	82	53
		2 SPANS	469	264	169	117	86	66	43
		1 SPAN	229	134	82	57	42	32	26



# PROFILE METCOPPO

Roof

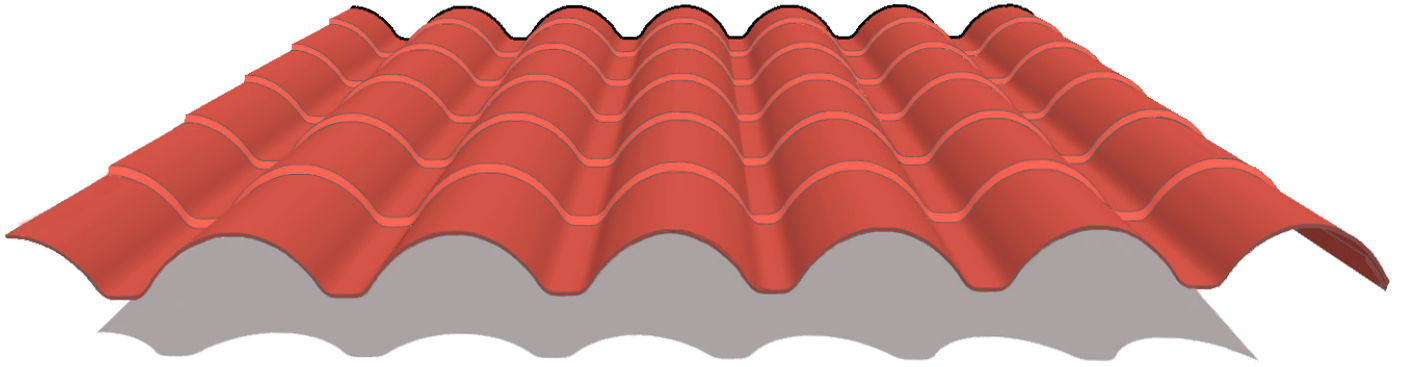

## FINISHES


RAL 8004  
WRINKLE



NEW  
ALBERO



AGED RED  
ROOF TILE

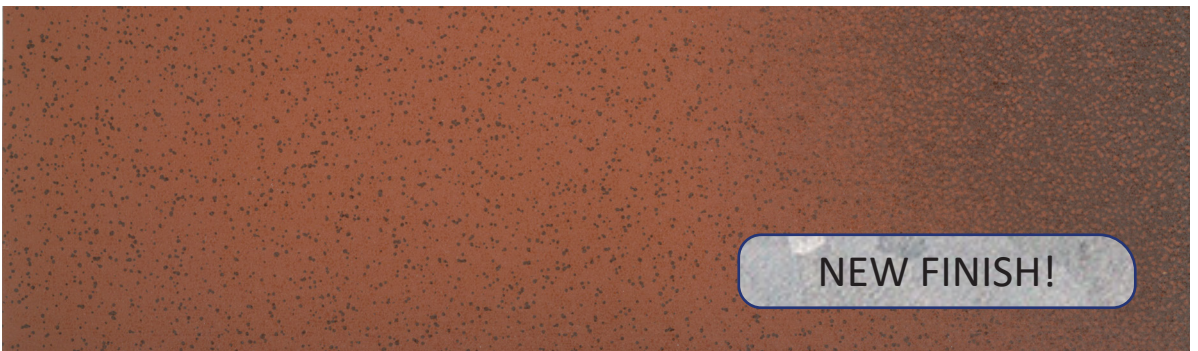

NEW FINISH!

RAL 7022  
WRINKLE

